


Digital Displacement Decoder D-DD-3N

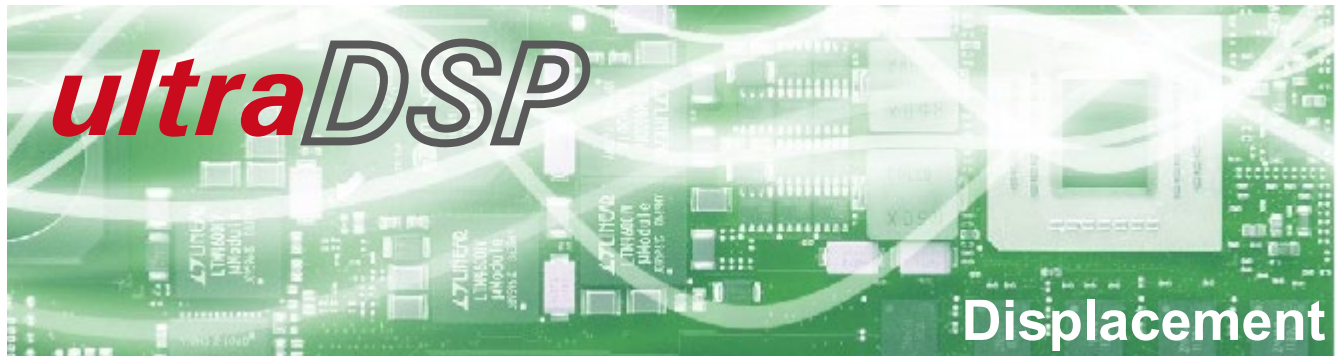

ultraDSP Technology - Ultrafast digital signal processing (ultraDSP)

OptoMET offer a complete line of vibrometer digital decoders. Compared to their analog counterparts, digital decoders offer much better precision, resolution, aging resistance, and sensitivity. The user can thus measure vibrations / dynamic motion (even very small amplitudes) with high precision. Practical applications also benefit from the excellent low-noise digital signal processing that allows measurements on nearly all types of surfaces and from a large distance.

OptoMET has implemented its ultrafast digital signal processing technology (ultraDSP), which combines efficient algorithms with extremely powerful hardware, to achieve exceptional velocity resolution, high frequency bandwidths and extremely large dynamic range of up to 9 decades for velocity measurements (nm/s - m/s).

Displacement Decoder

OptoMET offers a wide range of digital decoder options allowing customers to tailor any vibrometer model to their unique measurement requirements.

Each vibrometer can also be equipped with a displacement decoder in addition to the velocity decoder already installed. These decoders provide an excellent displacement resolution of down to 0.05 pm and, depending on the performance class, a working frequency range up to 10 MHz, and a maximum velocity of 24.5 m/s.


D-DD-3N Features:

- Digital Decoder
- 19 displacement measuring ranges
- Frequency range DC to 2.5 MHz
- Max. vibration velocity 24.5 m/s
- Resolution down to 0.05 pm

Technical data

The D-DD-3N displacement decoder can also measure displacements of objects with a very high velocity (up to 10 m/s). The working frequency range is between DC and 2.5 MHz. It is ideally suited to supplement velocity decoder D-VD-3N.

Pos.	Full Scale Output	Signal Frequency Range	Max. Velocity
	peak to peak μm	kHz	m/s
1	0.245	0 ... 2500	24.5
2	0.49	0 ... 2500	24.5
3	0.98	0 ... 2500	24.5
4	2.45	0 ... 2500	24.5
5	4.9	0 ... 2500	24.5
6	9.8	0 ... 2500	24.5
7	24.5	0 ... 2500	24.5
8	49	0 ... 2500	24.5
9	98	0 ... 2500	24.5
10	245	0 ... 2500	24.5
11	490	0 ... 2500	24.5
12	980	0 ... 2500	24.5
13	2,450	0 ... 2500	24.5
14	4,900	0 ... 2500	24.5
15	9,800	0 ... 2500	24.5
16	24,500	0 ... 2500	24.5
17	49,000	0 ... 2500	24.5
18	98,000	0 ... 2500	24.5
19	245,000	0 ... 2500	24.5

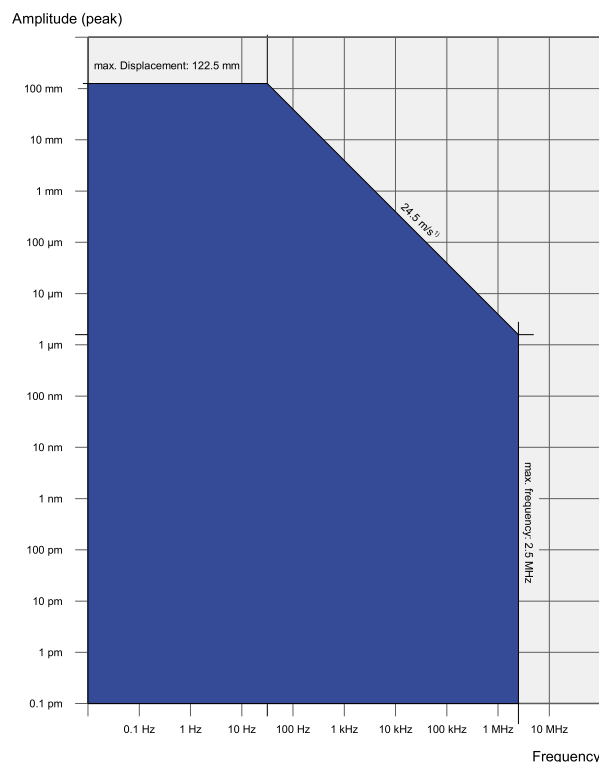

¹⁾Velocity limit is determined by the selected measurement range of the velocity decoder.