


Digital Displacement Decoder D-DD-2

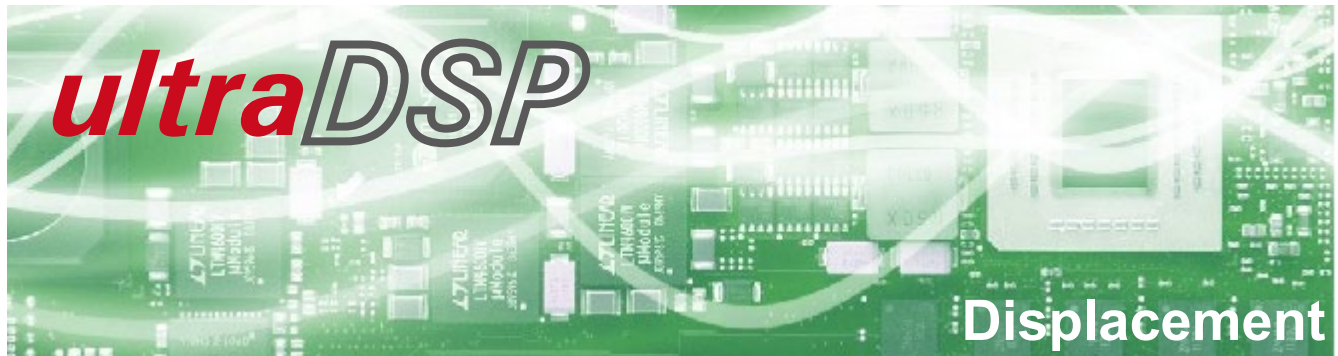

ultraDSP Technology - Ultrafast digital signal processing (ultraDSP)

OptoMET offer a complete line of vibrometer digital decoders. Compared to their analog counterparts, digital decoders offer much better precision, resolution, aging resistance, and sensitivity. The user can thus measure vibrations / dynamic motion (even very small amplitudes) with high precision. Practical applications also benefit from the excellent low-noise digital signal processing that allows measurements on nearly all types of surfaces and from a large distance.

OptoMET has implemented its ultrafast digital signal processing technology (ultraDSP), which combines efficient algorithms with extremely powerful hardware, to achieve exceptional velocity resolution, high frequency bandwidths and extremely large dynamic range of up to 9 decades for velocity measurements (nm/s - m/s).

Displacement Decoder

OptoMET offers a range of digital decoder options that can be used to upgrade or expand all models of the Vector Series so that you can tailor them to your measuring requirements.

Each vibrometer of the Vector Series can also be equipped with a displacement decoder in addition to the velocity decoder already installed. These decoders provide an excellent displacement resolution of down to 50 femtometers and, depending on the performance class, a working frequency range up to 10 MHz, and a maximum velocity of 10 m/s.

D-DD-2 Features:

- Digital Decoder
- 19 displacement measuring ranges
- Frequency range DC bis 1 MHz
- Max. vibration velocity 2 m/s
- Resolution down to 50 femtometers

Technical data

The D-DD-2 displacement decoder is the perfect supplement to a D-VD-2 velocity decoder. Together they provide an excellent sensitivity, even under challenging measuring conditions. It can measure displacements up to a velocity of 2 m/s and a vibration frequency of 1 MHz.

Pos.	Full Scale Output peak to peak	Signal Frequency Range	Max. Velocity
	μm	kHz	m/s
1	0.1	0 ... 1,000	2
2	0.2	0 ... 1,000	2
3	0.4	0 ... 1,000	2
4	1	0 ... 1,000	2
5	2	0 ... 1,000	2
6	4	0 ... 1,000	2
7	10	0 ... 1,000	2
8	20	0 ... 1,000	2
9	40	0 ... 1,000	2
10	100	0 ... 1,000	2
11	200	0 ... 1,000	2
12	400	0 ... 1,000	2
13	1,000	0 ... 1,000	2
14	2,000	0 ... 1,000	2
15	4,000	0 ... 1,000	2
16	10,000	0 ... 1,000	2
17	20,000	0 ... 1,000	2
18	40,000	0 ... 1,000	2
19	100,000	0 ... 1,000	2

